

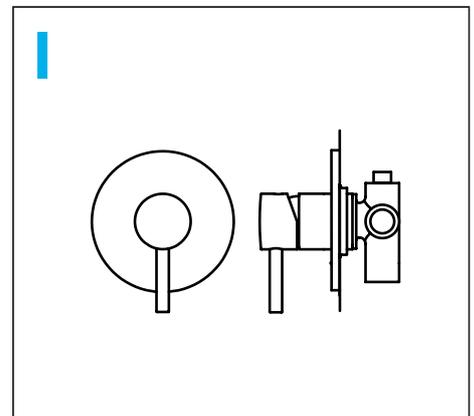
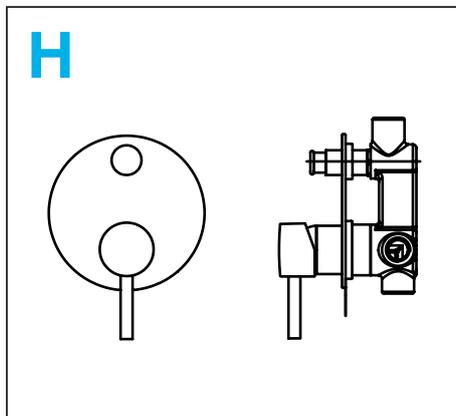
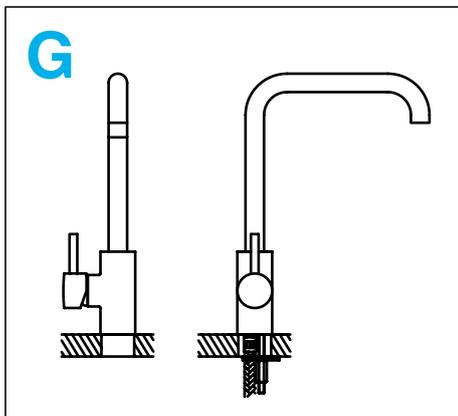
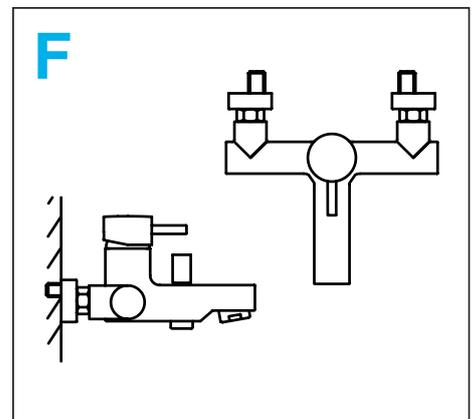
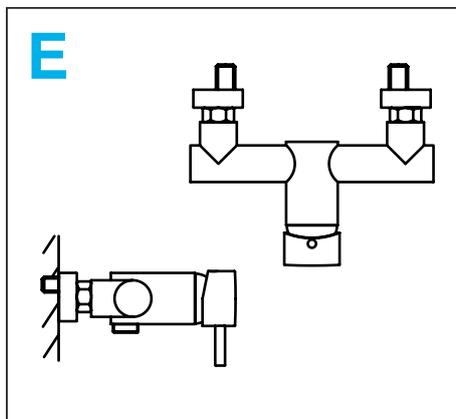
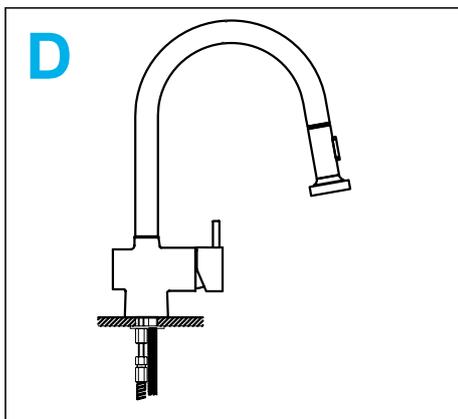
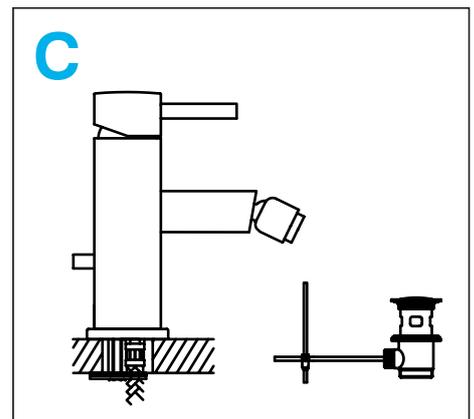


JIKA

MIO

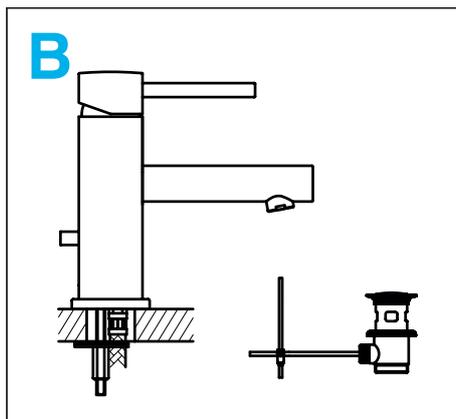

3.1171.1.004.001.1
3.1171.8.004.002.1
3.4171.1.004.001.1
3.2171.7.004.000.1
3.2071.6.004.000.1
3.3171.7.004.000.1
3.3071.6.004.000.1
3.5171.1.004.200.1
3.5171.1.004.300.1

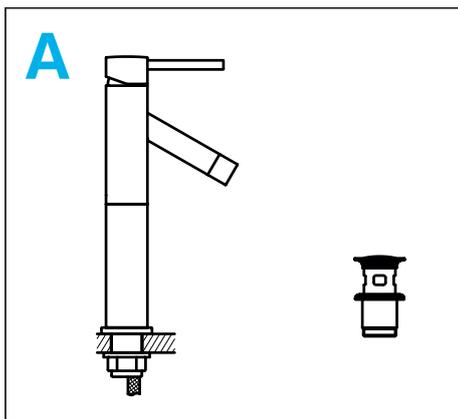

ABCDEFGHI

max. 10

0,5

- 90 MAX.

H₂O

P bar

6

4

T °C

- 65

- 45

1

ABCDEFG

2

ABCDG

3

A

4

BCG

5

10

D

6

3

2

1

D

7

ABCDG

8

19

°C

°C

BC

9

EF











10







°C

°C

EF

11

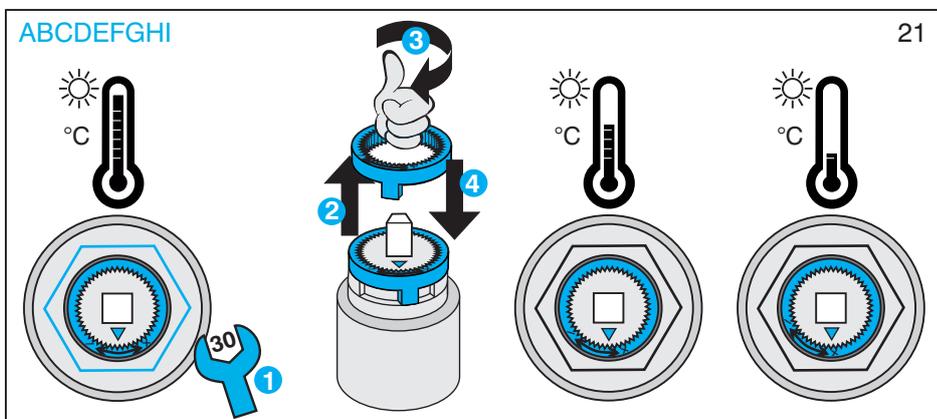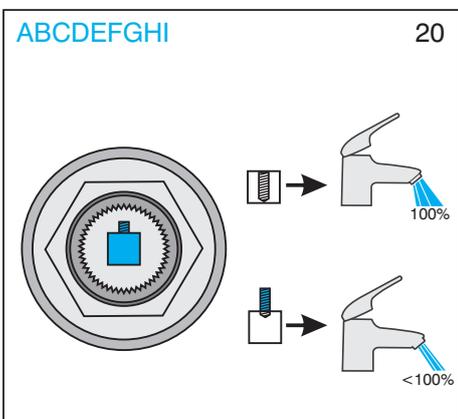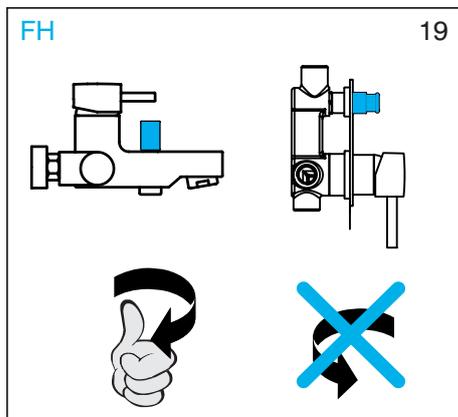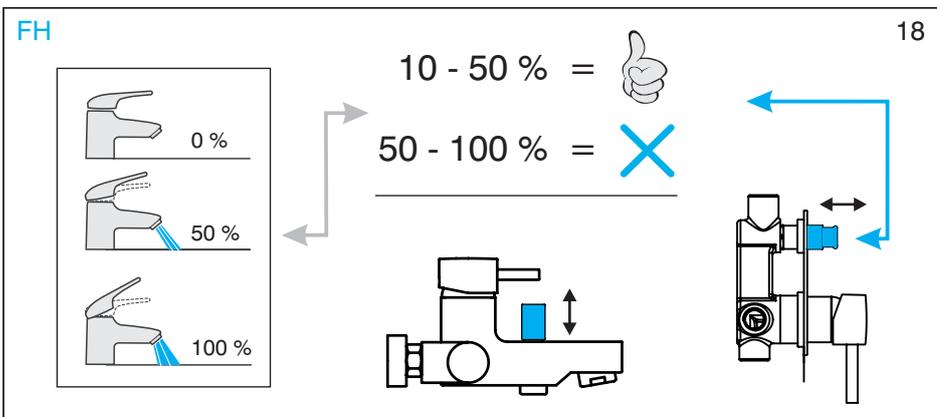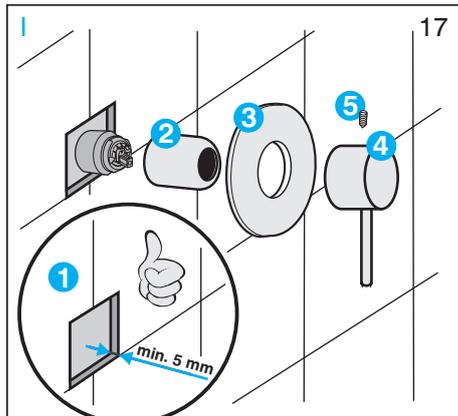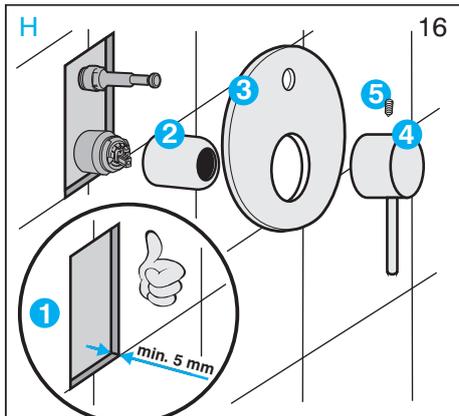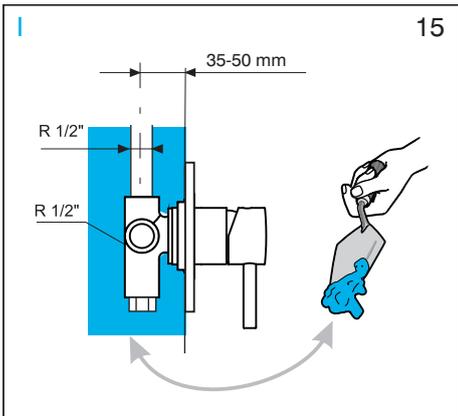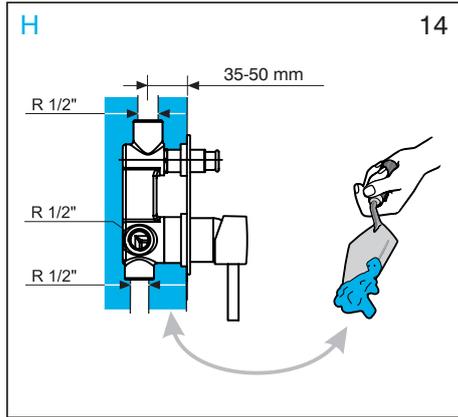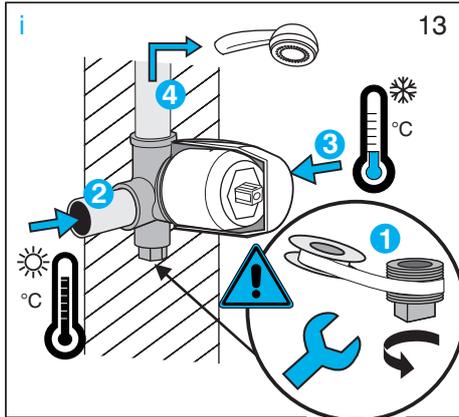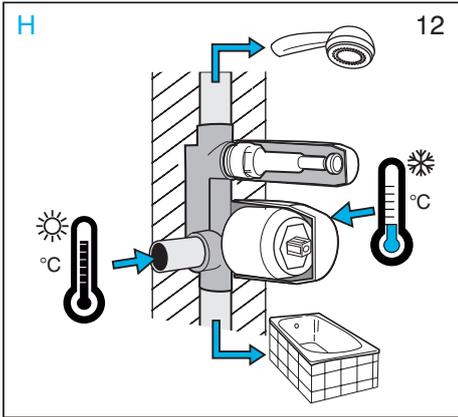

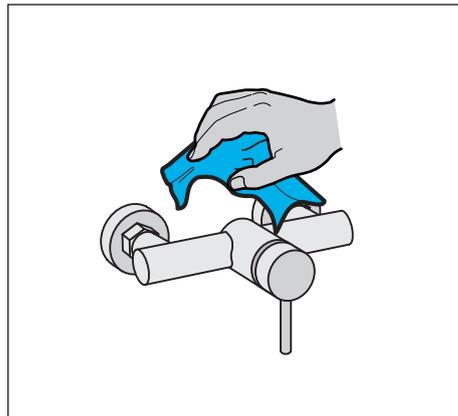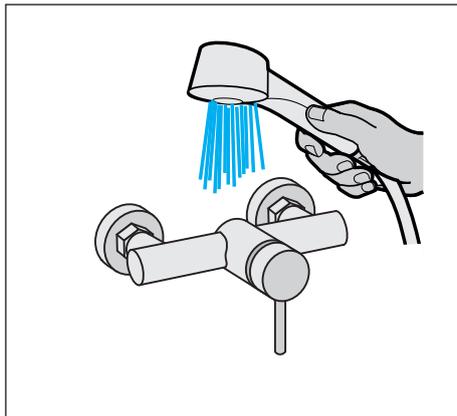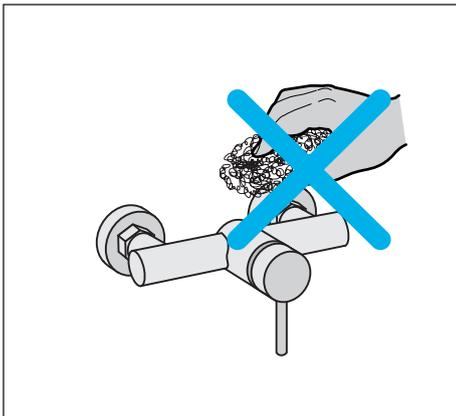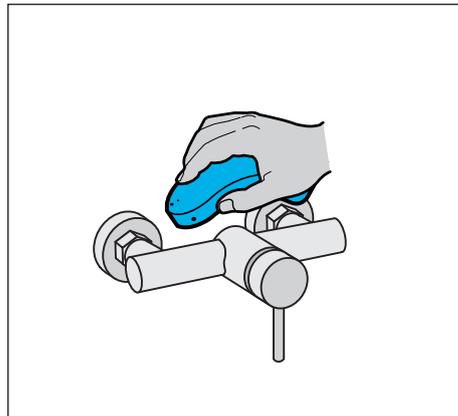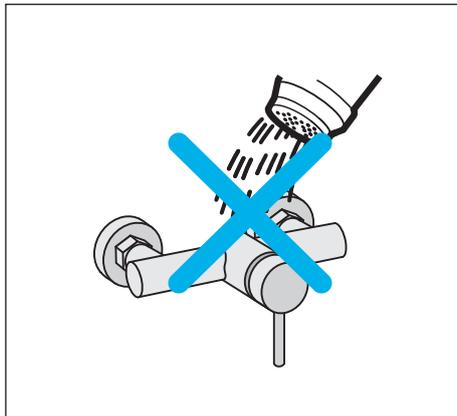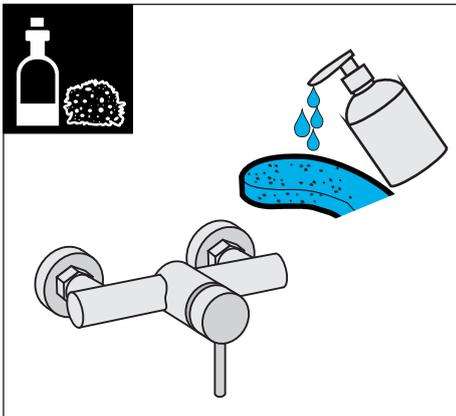

Výrobek je vhodný pro styk s pitnou vodou a pro styk s teplou vodou v souladu s platnou legislativou.

The product is suitable for contact with drinking water as well as for contact with warm water in compliance with valid legislation.

JIKA

LAUFEN CZ s.r.o.
V Tűních 3/1637
120 00 Praha 2
Česká republika
Fax: +420/296 337 713
e-mail: galerie@cz.laufen.com
www.jika.cz